

No.: 0098

The MED certificate (Marine Equipment Directive) is an EU authorisation for marine equipment. It is based on the Marine Equipment Directive 2014/90/EU and ensures that the equipment complies with the harmonised requirements.

firetests



Physical Appearance

Adhesive Part A

Chemical Type	Methyl Methacrylate
Color	off white paste
Density	approx. 0,96 g/cm ³
Viscosity @20°C mPa·s Brookfield	100.000 to 125.000

Activator Part B

Color	black
Density	approx. 1,07 g/cm ³
Viscosity @20°C mPa·s Brookfield	50.000 to 70.000

Mixture A&B

Color	black thixotropic gel
Viscosity @20°C mPa·s Brookfield Helipath < 4 min.	60.000 to 200.000
Processing time	4 - 6 minutes
Fixture time	4 - 5 minutes
Functional strength	1 to 3 hours
Functional cure	24 hours
Shelf-life 20°C	12 months

The values are average values. They serve merely for your information but assume no warranty.

Bergheimer Str. 15 | D-53909 Zülrich | Tel. 02252/94150 | info@marston-domsel.de
www.marston-domsel.de

The information in this product has been compiled to the best of our knowledge and is intended purely for information purposes. No claims can be inferred therefrom. Before use, thorough experiments should be carried out. Our brochure represents a basis. Responsibility for possible measures to protect property and persons lies with the user. Safety data sheets on the required standard are available for all products on request.




Typical properties cured material	
Tensile strength	22 - 25 MPa
Elastic properties	up to 140%
Shore Hardness ASTM D 2240	74
Gap filling	up to 10 mm
Temperature resistance	-55°C to +150°C, short term up to +180°C
Suitable substrates	
Carbon Steel, Styrene, Steel Gelcoats, Polyesters, FRP, Nylon, PPO, FRT, ABS, Wood, Aluminium, PBT, Stainless Steel, Fibreglass etc.	
Chemical resistance	
Excellent resistant to	<ul style="list-style-type: none"> ○ Hydrocarbons ○ Acids and Bases (3-10ph) ○ Salt Solutions
<p>Description MEGABOND 3000 is a high strength, fast curing two-part structural adhesive system, designed to offer high impact strength and fatigue endurance. On application, the grade's high viscosity is ideal for both gap filling and vertical surface applications, whilst also providing a degree of flexibility. For the bonding of, inter alia, Thermoplastics, but also excellent adhesion to Composites, and many metals, in most cases, without a primer.</p>	
<p>Processing information (50 g) The bonding surfaces must be clean, oil and grease free (e.g. with Marston Cleaner). Excellent results are obtained by a mechanical roughening of the adhesion surfaces. Insert the cartridge into the dispensing gun and then close. Twist off cap, attach and tighten the mixing nozzle. Push the material out with the dispensing gun and discard the first 2 g, as they are not yet mixed at 1:1. Setting time can be curtailed at high temperatures. Join work pieces together and fix. Store opened cartridge in a cool, dry place.</p>	

Bergheimer Str. 15 | D-53909 Zülrich | Tel. 02252/94150 | info@marston-domsel.de
www.marston-domsel.de

RoHS conform

Packaging	Item number
9 cartridges á 50 g	MMB.3.S50
6 cartridges á 380 g	MMB.3.S380

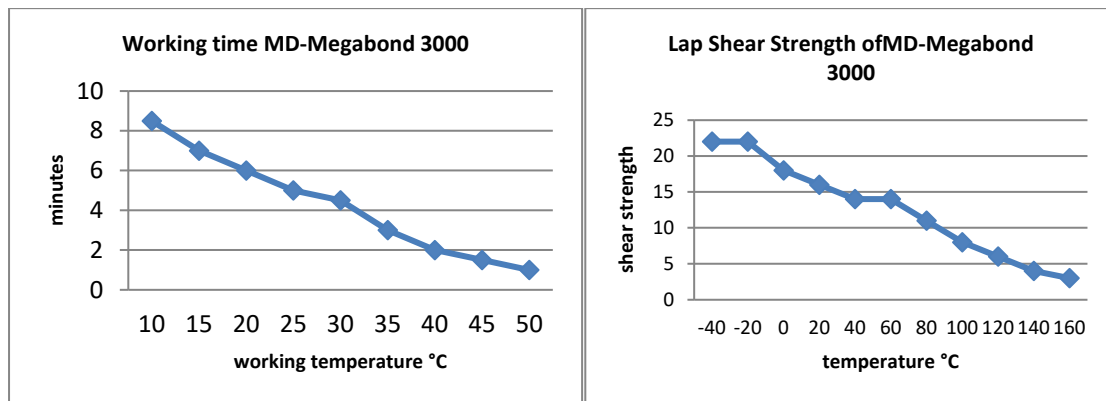

Bergheimer Str. 15 | D-53909 Zülrich | Tel. 02252/94150 | info@marston-domsel.de
www.marston-domsel.de

The information in this product has been compiled to the best of our knowledge and is intended purely for information purposes. No claims can be inferred therefrom. Before use, thorough experiments should be carried out. Our brochure represents a basis. Responsibility for possible measures to protect property and persons lies with the user. Safety data sheets on the required standard are available for all products on request.