

MOLISIL

MoS₂ ve Grafitli Yapıştırıcı Önleyici Sprey

ÖZELLİKLER

Temel:	Sentetik taşıyıcıda molibden disülfür ve grafit
Görünüm:	Kuru gri film
İtici:	Denatüre edilmiş ve kokusuz hidrokarbon (VOC içermez)
Direnç sıcaklığı:	700°C (molibden) disülfür)
CFC içermez	
Klor içermez	

ÖZELLİKLER

- Yüksek sıcaklıklara karşı iyi sıçrama önleyici
- İyi yağlayıcı

TANIM

MOLISIL, meşalenin nozulunu damla yapışmasına karşı korumak için ANTISPATTER olarak kullanılır. MoS₂ ve grafit içerdiği için çok iyi bir antispatter'dır ve normal bir antispatter'dan (yağ bazlı) çok daha fazla dayanıklıdır .


MOLISIL ayrıca hareket halindeki mekanik parçaları yağlamak, sürtünmeyi önlemek ve zorlanmayı azaltmak için YAĞLAYICI olarak da kullanılabilir. Yüksek sıcaklıklarda yağlamak için kullanılır.

KULLANIM TALİMATLARI

İşlem görece parçaları temizleyin ve yağdan arındırın. Küçük top serbestçe hareket edinceye kadar spreyi sürekli çalkalayın ve uygulama sırasında ürünü homojen tutmak için çalkalamaya devam edin. 25 cm mesafeden püskürtün. Kullanımdan sonra aerosolü ters çevirin ve valfin tıkanmasını önlemek için ürünü birkaç saniye püskürtün.

AMBALAJLAMA

Sprey Aerosol ml 500
Kutu 25 Aerosol
Ürün Kodu 11610/05

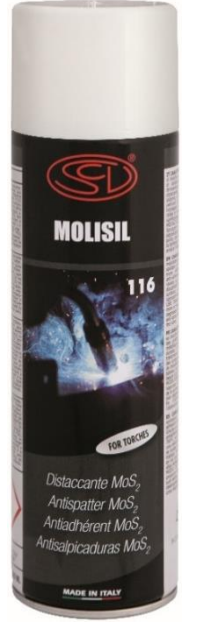

Revizyon tarihi 01.08.2016

The information and recommendations contained in this document is offered in good faith based on our current knowledge and belief accurate at the date of publication. Nothing herein is to be considered as a warranty, express or otherwise. In all cases, it is the responsibility of the user to determine the applicability of such information or the suitability of any products for their own particular purpose with local legislation and for obtaining the necessary certifications and authorisations. Siliconi Commerciale's sole warranty is that the products will meet its sales specification. The manufacturer cannot be held responsible in case of damages caused by incorrect use of the product.

® indicates a Registered TradeMarks of Siliconi Commerciale. All Rights Reserved.

SILICONI COMMERCIALE® Technical data- sheet

